



# Powermax105<sup>®</sup>

Professional-grade plasma metal cutting and gouging system for handheld cutting 1-1/4" and mechanized piercing 7/8".



Capacity	Thickness	Cut speed
	Cutting	
Recommended	1-1/4"	20 ipm
	1-1/2"	10 ipm
Severance (hand cutting)	2"	5 ipm
Pierce*	7/8"	

\* Pierce rating for handheld use or with automatic torch height control

Capacity	Metal removal rate	Groove profile
	Gouging	
Typical gouge	21.7 lbs per hour	.25" D x .29" W

### Maximum productivity

- Finish jobs faster with cut speeds three times greater than oxyfuel on 1/2" mild steel.
- Spend less time on grinding and edge preparation due to superior cut and gouge quality.

### Low operating costs

- Reduce costs with long consumable life and more uptime.
- Electrode end-of-life detection protects the torch and workpiece from damage by automatically stopping power when the electrode is overused.

### Easy-to-use for cutting and gouging

- No need to change the air pressure. Smart Sense™ technology ensures that it is always correctly set.
- Drag cut at full output with a patented shield that reduces dross buildup for smoother cutting.
- Tackle different jobs with multiple, easy-to-use torch styles.

### Built and tested to withstand the harshest conditions

- Duramax™ torches are designed for high-impact and heat resistance.
- SpringStart™ technology ensures consistent starting and a more reliable torch.
- Low maintenance for maximum uptime.

### Duramax standard torch styles

(for more torch options, see [www.hypertherm.com](http://www.hypertherm.com))



75° hand torch



15° hand torch




180° mini machine torch



180° full-length machine torch

### Relative cut performance on mild steel

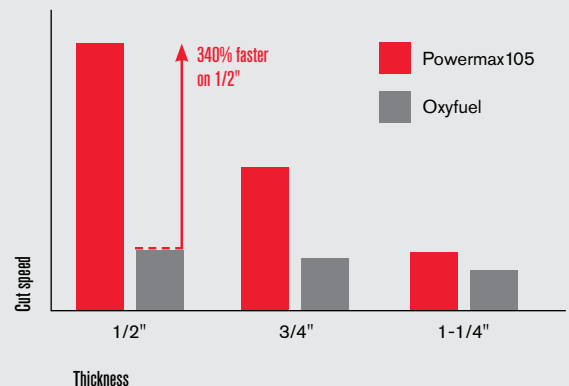

## Specifications

Input voltages	200–600 V, 3-PH, 50/60 Hz
Kilowatt output	16.8 kW
Input current @ 16.8 kW	200/208/240/480/600 V, 3-PH 58/56/49/25/22 A
Output current	30–105 A
Rated output voltage	160 VDC
Duty cycle @ 104° F (40° C)	70% @ 105 A, 240 V, 3-PH 80% @ 105 A, 480–600 V, 3-PH 100% @ 94 A, 480–600 V, 3-PH 100% @ 88 A, 240 V, 3-PH
Open circuit voltage (OCV)	300 VDC
Dimensions with handles	23.3" D; 10.8" W; 20.0" H
Weight w/25' torch	100 lbs
Gas supply	Clean, dry, oil-free air or nitrogen
Recommended gas inlet flow rate/pressure	Cutting: 460 scfh, 7.7 scfm @ 85 psi Gouging: 480 scfh, 8.0 scfm @ 70 psi
Input power cable length	10'
Power supply type	Inverter – IGBT
Engine drive requirement	30 kW for full 105 A output
Certifications	CSA-certified for use in the Americas and Asia, except China
Warranty	Power supplies have a 3-year warranty and torches a 1-year warranty



## Ordering information

Below are the standard system configurations, which include a power supply, torch and work cable.

	75° hand torch		75° and 15° hand torch		180° full-length machine torch						180° full-length machine torch and 75° hand torch
	25'	50'	25'	50'	25'			50'			25'
Power supplies			without remote pendant		with remote pendant	without remote pendant	with I/O cables (no pendant)	with remote pendant	without remote pendant	with I/O cables (no pendant)	with remote pendant
Standard power supply	059374	059375									
Power supply with CPC port and voltage divider	059376	059377	059382	059383	059378	059380		059379	059381		059384
Power supply with CPC port, voltage divider and serial port							059386			059387	



**Custom configurations** (select power supply, torch, consumable kit, work cable, and other components)

**Power supply options**

	Standard power supply	Power supply with CPC port and voltage divider	Power supply with CPC port, voltage divider, and serial port
200–600 V CSA	059370	059371	059372

**Starter kit consumable options**

	Handheld	Mechanized	Mechanized with ohmic retaining cap
Kit	228849	228848	228969

**Torch options**

Cable length	Hand torches		Machine torches		Robotic torches		
	75°	15°	180°	Mini 180°	45°	90°	180°
15'			059476	059481			
25'	059473	059470	059477	059482	059464	059465	059466
35'			059478	059483			
50'	059474	059471	059479	059484			
75'	059475	059472	059480				

**Cable options**

Cable length	Work cables			Control cables					
	Hand clamp	C-style clamp	Ring terminal	Remote pendant	CNC, spade connector, divided voltage	CNC, spade connector, no divided voltage	CNC, D-sub connector, divided voltage	RS-485 Serial comm, unterminated	RS-485 Serial comm, D-sub
25'	223254	223287	223284	128650	228350	023206	223048	223236	223239
50'	223255	223288	223285	128651	228351	023279	123896	223237	223240
75'	223256	223289	223286	128652					

**Torch consumable parts**

Nozzles and electrodes are available in various quantities. Contact your distributor for more information.

Consumable type	Torch type	Amperage	Nozzle	Shield/Deflector	Retaining cap	Electrode	Swirl ring
Drag-cutting	Hand	45	220941	220818	220854	220842	220994
		65	220819				
		85	220816				
		105	220990	220992			
Mechanized	Machine	45	220941	220817 or 220955 <sup>1</sup>	220854 or 220953 <sup>2</sup>	220842	220994
		65	220819				
		85	220816				
		105	220990	220993 or 220955 <sup>1</sup>			
FineCut®	Hand	45	220930	220931	220854 or 220953 <sup>2</sup>	220842	220947
	Machine			220948			220994
Gouging	Hand	30–105	220991	220798	220854	220842	220994
	Machine						

<sup>1</sup> Deflector for unshielded cutting

<sup>2</sup> Ohmic retaining cap

## Recommended Hypertherm genuine accessories



### Hyamp™ helmet

Premium auto-dim shade 8–12 with large 7.92 square inches viewing area for cutting, welding and gouging. Includes clear safety shields, pouch and sticker sheet. ANSI Z87.1, CSA Z94.3, CE

017031



### Leather torch sheathing

Available in 25' sections, this option provides additional protection for torch leads against burn-through and abrasion.

024548 Brown leather

024877 Black leather with Hypertherm logos



### Wheel/gantry kits

Complete, pre-assembled kits for added mobility or mounting on a cutting table gantry.

229467 Powermax105/125 wheel kit

229570 Powermax105/125 gantry kit



### Air filtration kit

A ready-to-install kit with a 1-micron filter and an auto drain moisture separator protects against contaminated air. Made in USA

228890 Filter plus cover for Powermax105/125

011092 Replacement filter element for Eliminator

101215 Cover only for Powermax105/125



### System dust covers

Made from a flame-retardant vinyl, a dust cover will protect your Powermax system for years. Made in USA

127360 Cover, Powermax105



### Hyamp cutting and gouging gloves

Insulated for heavy duty applications. Fire resistant goatskin leather and suede. Padded areas for extra heat and abrasion protection. Made in USA

017025 Medium

017026 Large

017027 X-Large

017028 2X-Large

Engineered and assembled in the USA

ISO 9001:2008

Environmental stewardship is a core value of Hypertherm. Our Powermax products are engineered to meet and exceed global environmental regulations including the RoHS directive.



Hypertherm, Powermax, Smart Sense, Hyamp, Duramax and SpringStart are trademarks of Hypertherm Inc. and may be registered in the United States and/or other countries. All other trademarks are the properties of their respective owners.

© 9/2014 Hypertherm Inc. Revision 3  
860330

**Hypertherm**<sup>®</sup>  
**Cut with confidence**<sup>®</sup>

